


# GUARDIAN LINE *PLUS*

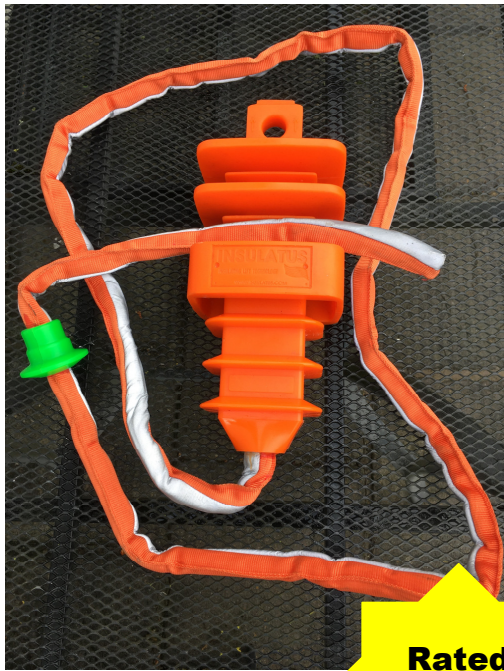

Conforms to ANSI/CPLSO-14-2016

- All Weather Performance
- Designed for Construction Environment
- Lightweight, Portable and Versatile
- Personal Defence System
- No Tangle—No Knots—No Whiplash with the high visibility Integrated Line

**Rated  
120k**

## Specifications

Rated Operating Voltage—Dry	120kV
Rated Operating Voltage—Wet	75kV
Operating Temperature	-30°C to +60°C
Lightning Strike	Not Lightning Proof


## Size & Dimensions

Safe Working Load	Not For Lifting
Pin Diameter	25mm
Hole to Base	330mm
Weight	3kg

**Flexibility.....** The Guardian Line *Plus* can be used in unlimited sequence with the Tagline Connector and Tagline Insulator to provide the level of protection required.

For example: 1 x Guardian Line *Plus* used with 1 x Tagline Connector + 1 x Tagline Insulator would provide safe (dry rated) insulation up to 200kV dry.

**Easy Assembly/Disassembly .....** Using the supplied Polyurethane fixing studs it's easy to secure the Tagline Connector in place and then remove when the job has finished.

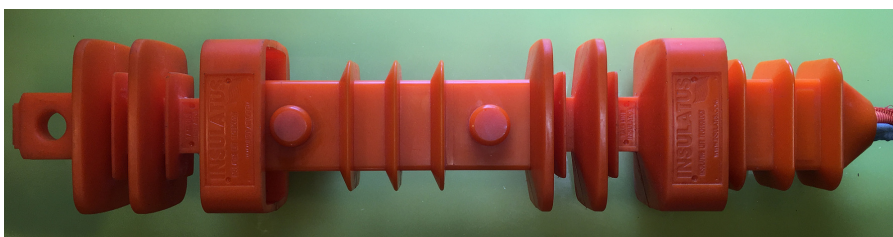

**Rated  
200kV**